

Features

- 2700K color temperature
- Selectable High/Low/Off switch
- Includes bi-pin G8 Xenon lamps
- · Lasts three times longer than halogen
- · Low profile design approximately 1" high
- Dimmable with standard incandescent dimmers
- Direct hardwire installation
- · Captive screw mounting
- cULus Listed for indoor dry locations
- 8,000 hours rated life

Available Sizes

10" / 14" / 22" / 32"

Available Finishes







White

Brushed Steel Dark Bronze

Dimming Options

• TRIAC (1-100%)

Listing / Ratings




Priori Xenon

This value-priced series is available in four sizes and three finishes. Easily dimmable and 99 CRI, xenon undercabinet lights still remain popular. Captive mounting screws, direct end-to-end linking, linking cable accessories, and knockouts located every 4" along the back and the top make installations customizable. Use the hardwire box accessory, which includes a 12" linking cable, to bring fixtures to the fronts of cabinets.

Technical Information

Series	043X
Input Voltage	120V AC, 60Hz
CCT	2700K
CRI	99+
Wattage	Up to 80W (see individual product)
Lumens	Up to 346Lm (see individual product)
Beam Angle	120°
Max Run	600W
Dimmable	1-100%
Mounting	Surface mount
Rating	cULus Listed (dry location)
Rated Life	8,000 hrs

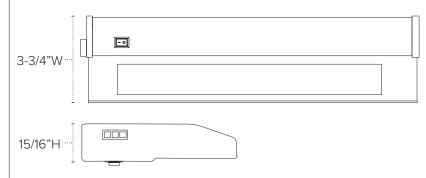

Priori Xenon







Priori Xenon - White **043X-1-WH** (9-13/16" / 20W / 82Lm) **043X-2-WH** (14-1/2" / 40W / 170Lm) **043X-3-WH** (22-1/2" / 60W / 258Lm)

043X-4-WH (32-1/8" / 80W / 346Lm)

Priori Xenon - Brushed Steel **043X-1-BS** (9-13/16" / 20W / 75Lm) **043X-2-BS** (14-1/2" / 40W / 155Lm) **043X-3-BS** (22-1/2" / 60W / 235Lm) **043X-4-BS** (32-1/8" / 80W / 315Lm)

Priori Xenon - Dark Bronze

043X-1-DB (9-13/16" / 20W / 75Lm)

043X-2-DB (14-1/2" / 40W / 155Lm)

043X-3-DB (22-1/2" / 60W / 235Lm)

043X-4-DB (32-1/8" / 80W / 315Lm)

Priori Xenon fixtures include: (1) 3/8" cable connector / (1-4) 20W xenon lamps / Captive mounting screws

Priori Xenon Accessories



Hardwire Junction Box **043J-WH** (White) **043J-DB** (Dark Bronze)



120V AC Power Cord (6ft) **043A-PC6-WH** (White) **043A-PC6-BK** (Black)



Linking Cables (White) 043A-6-EX-WH (6") 043A-12-EX-WH (12") 043A-24-EX-WH (24") 043A-36-EX-WH (36")



Linking Cables (Black) 043A-6-EX-BK (6") 043A-12-EX-BK (12") 043A-24-EX-BK (24") 043A-36-EX-BK (36")



Replacement Lamp **043X-20BP** (20W bi-pin G8)