



INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.



NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

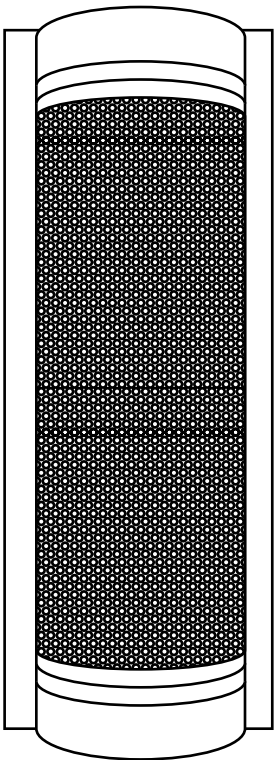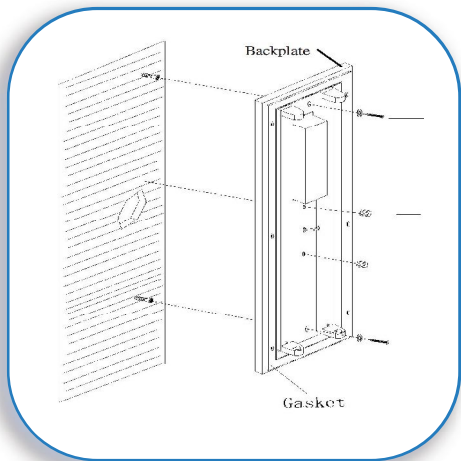

COLLECTION	APPLICATION	MODEL NO.
	Wall Fixture	20347

WHAT WE PROVIDE

- Back Plate
- Mounting Hardware
- Gasket
- 1 x Crossbar
- 1 x Glass diffuser
- 1 x Front Cover
- 2 x 24W T5 HO Tubes


WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

1

MARK BACK PLATE LOCATION

Determine the desired location of your fixture. Hold the back plate up to the surface and mark with a pencil the location of the mounting plugs (small hole on the up and down side of the back plate). Drill a hole and insert the mounting plugs into the mounting surface.

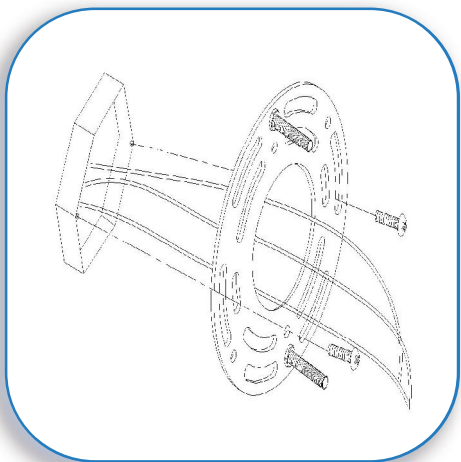


2

MOUNT CROSSBAR

If there is an existing fixture remove it.


Mount the crossbar with bracket to the J-box with the supplied screws. Make sure that the additional

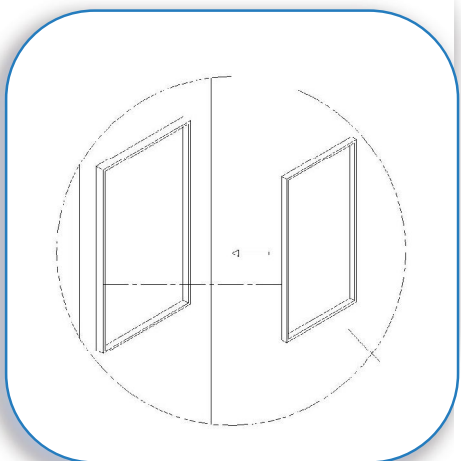

3

ADD THE GASKET

Fit the supplied Gasket onto behind the Back plate.

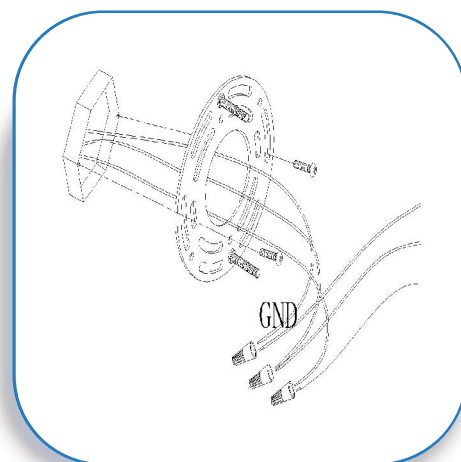


4

MAKE WIRE CONNECTIONS

Gently pull the supply wires through the hole in the crossbar . Gently feed the fixture wire through one of the slits in the back plate and then through the hole floating canopy. Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground wire. Secure all wire with electrical tape (not supplied).


Tuck all wires carefully into the J-Box.

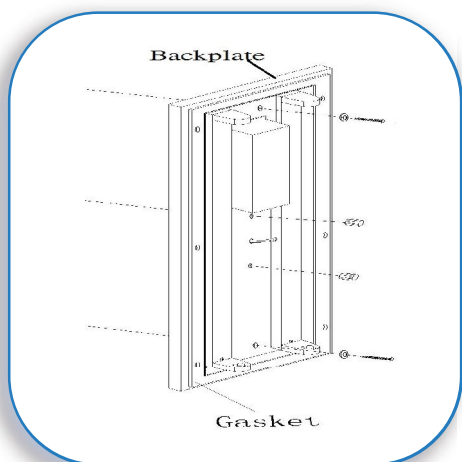

5

MOUNT THE BACK PLATE

Feed the nipple from the crossbar through the designated hole in the back plate. Use the supplied thumb nut to secure the nipple to the back plate. Hold the back plate up to the mounting surface, insert the supplied screws in the mounting plugs and secure the back plate to the mounting surface.

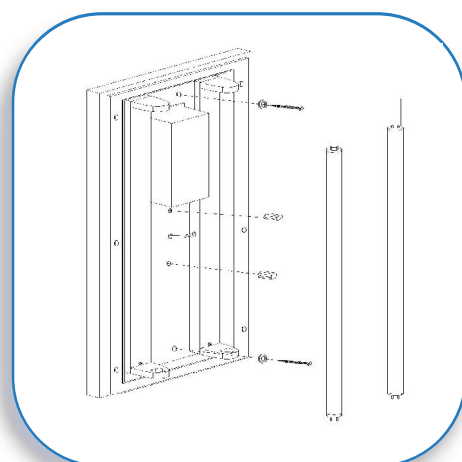


6

INSERT TUBE

Insert the Tubes.

MAXIMUM WATTAGE 24W.

DO NOT EXCEED THE WATTAGE AS STATED ON THE WARNING LABEL AND IN THE INSTRUCTION SHEETS

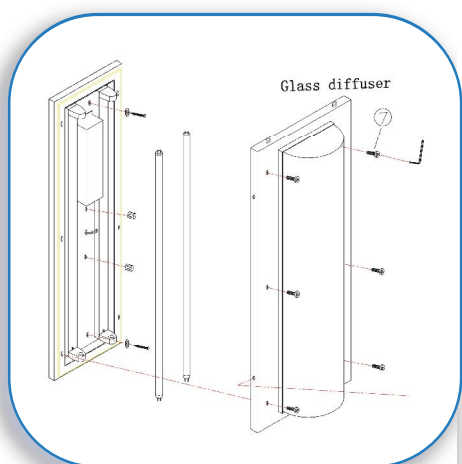


7

SECURE THE GLASS DIFFUSER

Position the glass diffuser over the back plate.

Align the holes at the left and right of the plates.


Secure with the supplied allen screws and L-type screw driver.

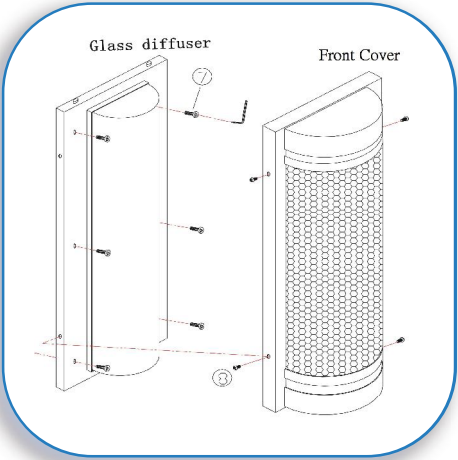

8

SECURE THE FRONT COVER

Position the front cover over the glass diffuser.
Align the holes at the left and right of the plates.
Secure with the supplied screws.

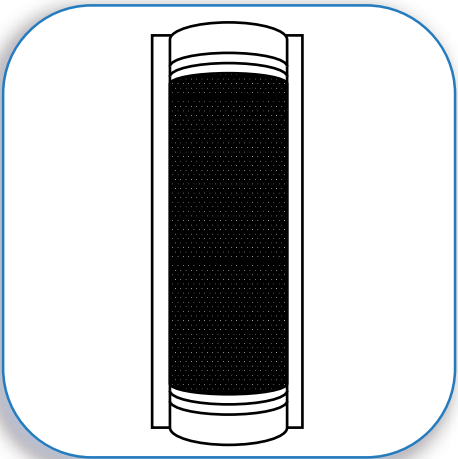

9

**RESTORE THE ELECTRICITY AND
CHECK THE OPERATION OF YOUR
NEW ACCESS FIXTURE**

CAUTION

Please ensure that the fitting is cool and switched off before replacing the bulb. DO NOT use bulbs that might exceed the maximum wattage, stated on caution label.