


CANCUN™

FP80120B-220 52" Wet Location Fan

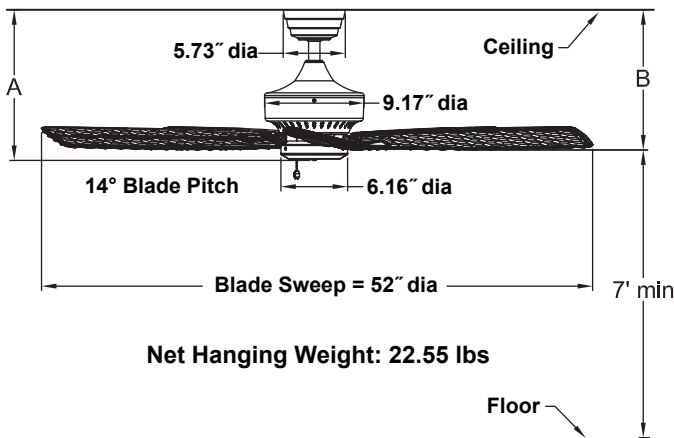

	A	B
Fan w/4.5" downrod	13.91"	12.95"
Fan w/12" downrod	21.41"	20.45"
Fan w/18" downrod	27.41"	26.45"
Fan w/24" downrod	33.41"	32.45"
Fan w/36" downrod	45.41"	44.45"
Fan w/48" downrod	57.41"	56.45"
Fan w/60" downrod	69.41"	68.45"
Fan w/72" downrod	81.41"	80.45"

Available Finish

OB Oil-Rubbed Bronze

TUV/GS Efficiency Info (220V)

Fan Speed	Max RPM	Amps	Watts
High	137	0.33	78
Med	89	0.22	34
Low	53	0.14	12

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 220~240 volts AC, 50 Hz, 5 amp circuit.

MOTOR SPECS:

188 x 25-200 motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 22" wet location rated all-weather antique woven bamboo finish blades is included.

CONTROL OPTIONS:

Optional C1-220, C2-220, C3-220 and C6-220 wall controls and CR4WH-220 remote control (with receiver units) are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for lighting options.

DOWNROD OPTIONS:

The Cancun™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Cancun™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations.